



## CMI215-935F



### Features

- Intel® Core™2 Quad / Core™2 Duo processors, up to 65W
- Supports 2x Serial Ports RS232 & RS232/422/485
- 2x 10/100/1000Base-T Ethernet
- 6x USB 2.0 Ports
- PCI-E(x16) Expansion Slot
- Supports 1x 2.5" SATA HDD drive bay

### Specifications


System Mainboard	MI953F
CPU Type	Intel® Core™2 Quad Intel® Core™2 Duo processor *** Support CPU Wattage Upto 65W ***
CPU Package	LGA775
System Chipset	Intel® Q35 Express + ICH9/ICH9R
Build-In Graphic Controller	Intel® Graphics Media Accelerator 3100
Memory	667/800MHz DDRII SDRAM up to 4GB
Expansion	1x PCI-E(x16) Slot
Chassis Color	Black
Construction	SECC
Front Panel External I/O	Power On/Off button w/ LED HDD LED
Rear Panel External I/O	2x DB9 (RS232 & RS232/422/485) 1x DB15 (CRT) 2x RJ45 (Gigabit LAN) 4x USB 2.0 2x RJ45 connectors (Gigabit LAN) 1 x ESATA 3x Audio Jack (Line In, Line Out, Microphone) 2x KB/MS connector 1 x Slot for PCI / PCI-E(x16) Card 1x AC-inlet
Storage	1x 2.5" SATA HDD drive bay
Power Supply	180W Flex ATX Power Supply Input Voltage : 90 ~ 264 Volt Input Frequency : 47 ~ 63 Hz
Mounting	Optional wall mount kit
Dimensions	310mm(W) x 215mm(D) x 72mm(H)

### Environmental

Operating Temperature	0°C ~ 45°C (32°F ~ 113°F)
Storage Temperature	-20° ~ 80°C
Relative Humidity	5~90% @ 45°C, (non-condensing)
Vibration	Non-Operating : 1.0 grms / 5~500Hz / random Operating : 0.25 grms / 5~500Hz / random

### Ordering Information

CMI215-935F-180	Signage System with MI935F Mini-ITX, 2.5" HDD Bracket and 180W Power Supply
CMI215-935F-250	Signage System with MI935F Mini-ITX, 2.5" HDD Bracket and 250W Power Supply
CMI215-935F-300	Signage System with MI935F Mini-ITX, 2.5" HDD Bracket and 300W Power Supply

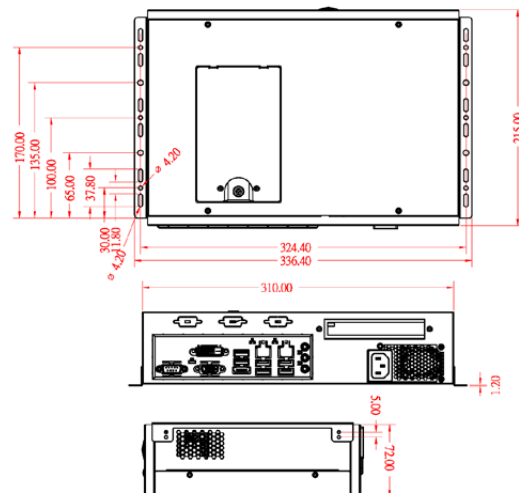

Remarks: 1. Use only CPU/heatsink with height fitting the chassis-not touching the chassis top cover.  
2. ODM/OEM is available.



- 1 Motherboards
- 2 Disk-Size SBCs
- 3 CPU Modules
- 4 PC/104 Puls
- 5 CPU Card
- 6 Embedded Systems
- 7 Network Security Appliance