

Features

- 8-Ch. AO slave module
- Max. 100Mbps transfer rate
- Rotary switch for address setting
- Easy installation with RJ45 phone jack and LED diagnostic
- Pluggable terminal block with spring plug connectors
- DIN rail mounting (L-122 x W-65 x H-104 mm)


Specifications

Serial interface	Fast Ethernet, Full-Duplex
Distributed Clock	1ms
Cable type	CAT5 UTP / STP Ethernet cable
Surge protection	10KV
Transmission speed	100Mbps
I/O isolation voltage	3750Vrms
Number of outputs	8-channel AO
Effective resolution	16bits
Accuracy	±0.1%
Output range	±10V
Operation mode	Ramp and Noise, Single Value, Single Coupled Value, Pattern
Power input	24VDC±10%
Power consumption	3W typical
Working temperature	0 to 60°C

Ordering Information

207-A204F	8-Ch. Analog Output (AO)
SCB-1BB-06A/10A /20A/30A/50A/A0A	CAT5 LAN cable, 0.6M/1M/2M/3M/5M/10M

Dimensions and Drawing

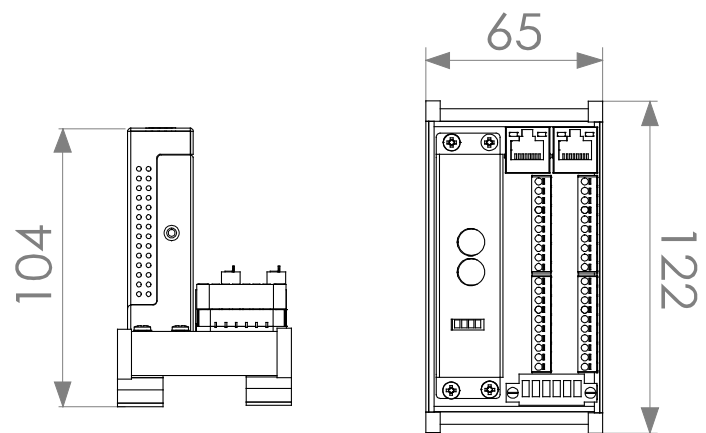

01 EtherCAT Digital Slave

02 EtherCAT Analog Slave

03 EtherCAT Motion Slave

04 EtherCAT Microstep Driver

05 EtherCAT Start-KIT